Jandy®

CREATE A SALTWATER OASIS

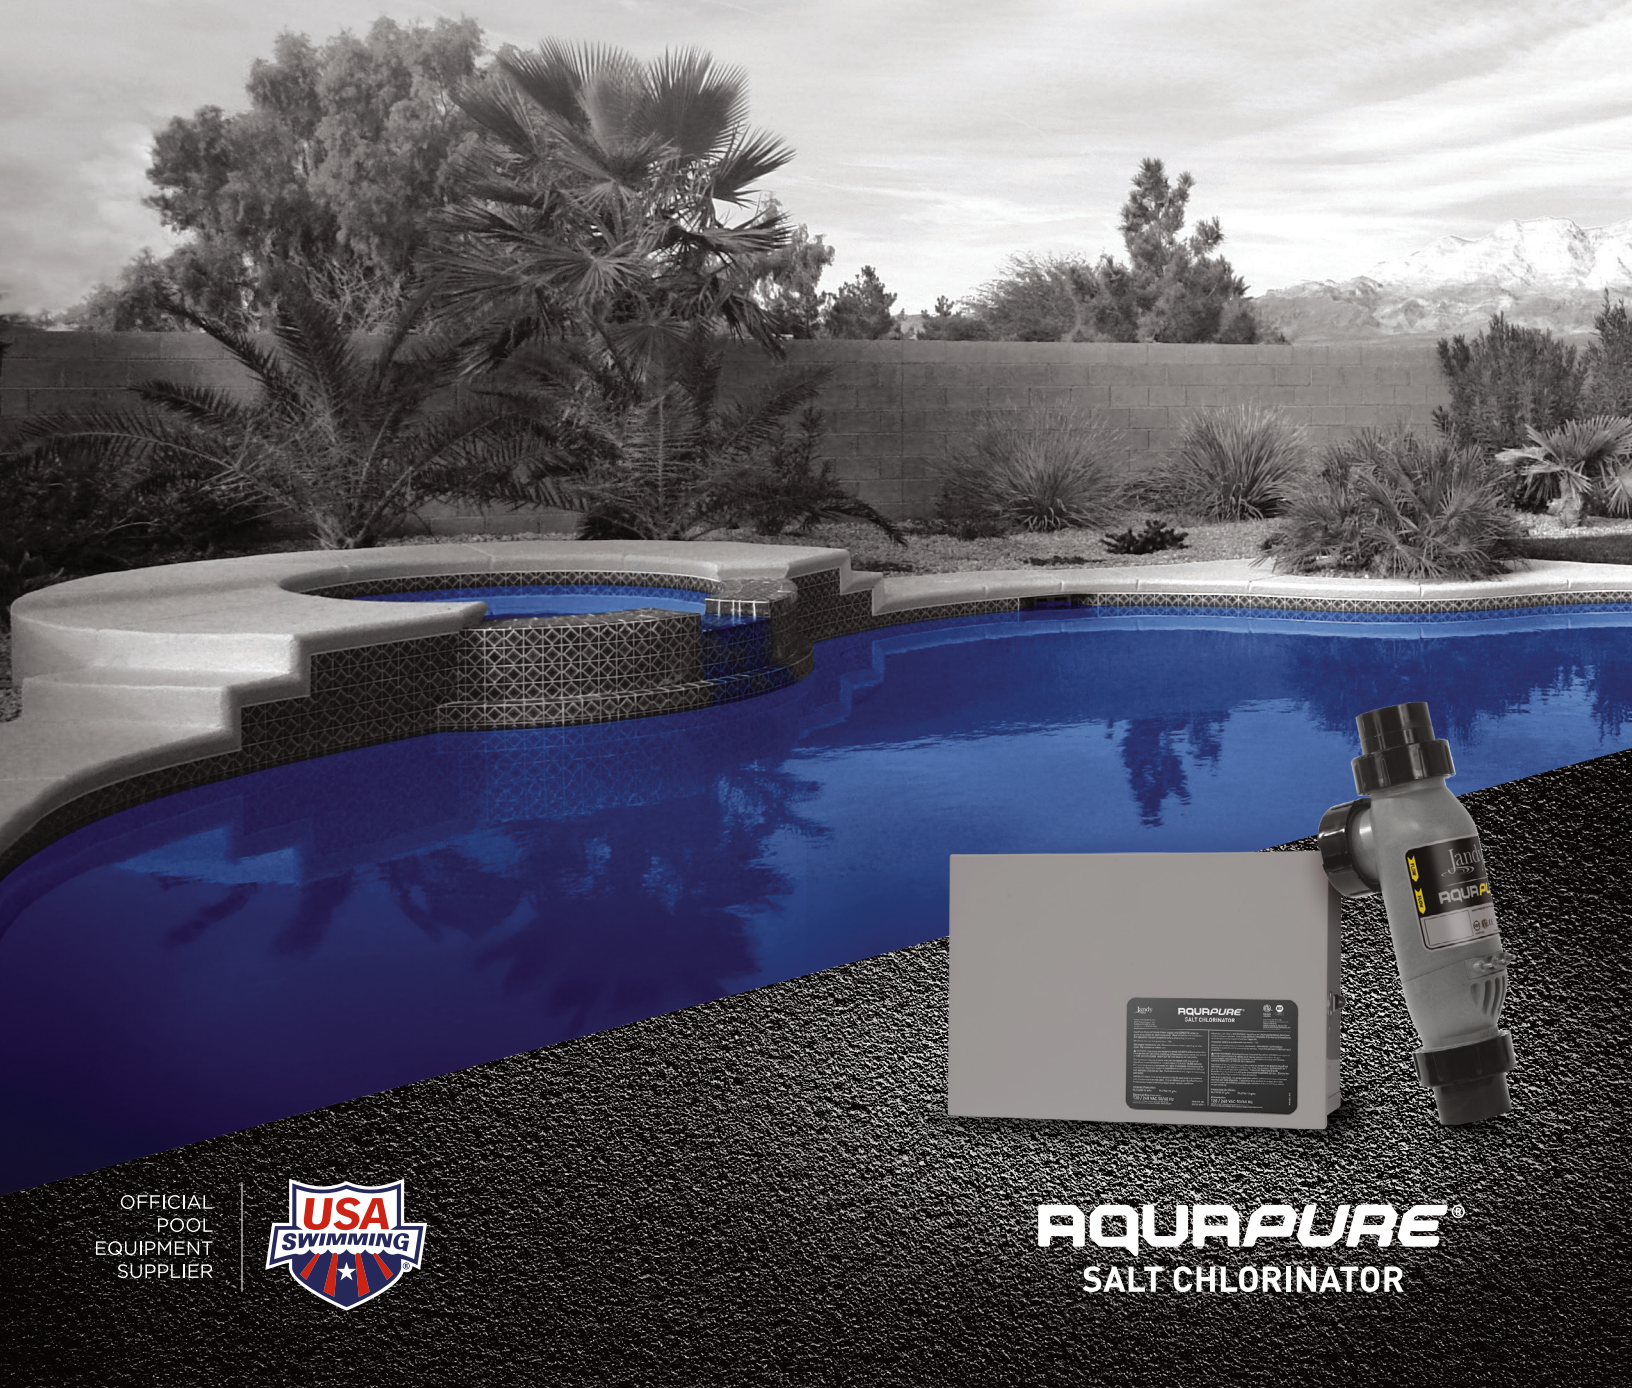

OFFICIAL POOL EQUIPMENT SUPPLIER

USA SWIMMING

AQUAPURE®
SALT CHLORINATOR

The Heavy-Duty Standard for Maximum Performance

AquaPure® Salt Chlorinators* use salt water to deliver high-performance water sanitation with uncompromised performance, reliability, and hydraulic efficiency.

- **Robust Features**
  - Automatic self-cleaning feature ensures consistent operation and extends the life of the cell
  - Professional-grade, ruthenium coated titanium electrodes for long-term reliability
  - Exclusive Tri-Sensor technology — reliable electronic water flow detection to ensure maximum performance, even at very low flow rates (to take advantage of the benefits of VS pumps)
  - Digital salinity read-out for accurate salt level indication
  - Flow, temperature, and status readings provide instant feedback on the current operation
- **Easy Integration**
  - Seamless communication with AquaLink® Control systems, enabling easy monitoring of salt levels and convenient, precise sanitizer output settings
  - When combined with PureLink™ power centers, AquaLink and AquaPure work together for the ultimate in pool sanitizing and remote operation convenience

*AquaPure PLC cell kits require the APUREM power center for standalone use.

SPECIFICATIONS

Model	PLC700	PLC1400 (PLC1400C in Canada)
Pool Size**	Up to 12,000 Gal (45,425 L)	Up to 40,000 Gal (151,416 L)
Input	120 VAC, 50/60 Hz, 1.5 AMPS	120 VAC, 50/60 Hz, 2.5 AMPS
	240 VAC, 50/60 Hz, 0.75 AMPS	240 VAC, 50/60 Hz, 1.25 AMPS
Output	22-30 VDC @ 3 AMPS maximum	22-30 VDC @ 6 AMPS maximum
Chlorine	0.625 lb./24 Hr. (283 gm/24 Hr.)	1.25 lb./24 Hr. (567 gm/24 Hr.)
Recommended Flow Rate	20-120 GPM	20-120 GPM

**Pool sizes are generalizations and may vary with environmental conditions. Pools with greater exposure to sunlight may require greater chlorine production capacity.

HEAD LOSS CHART

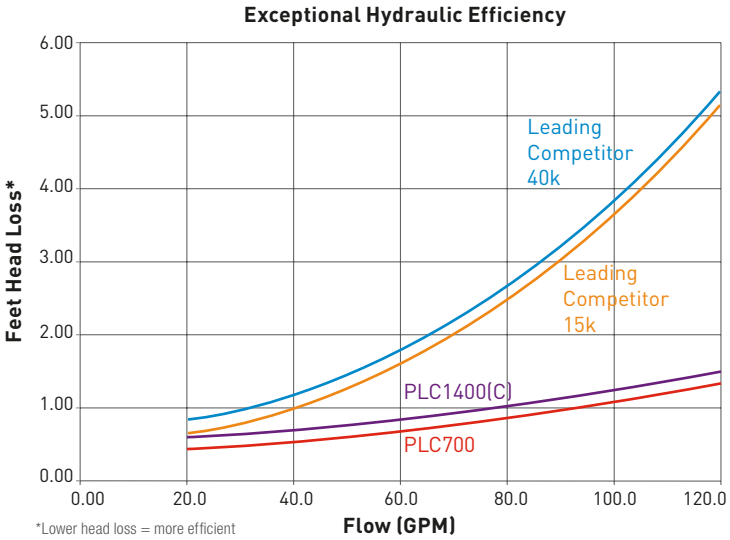

*Lower head loss = more efficient

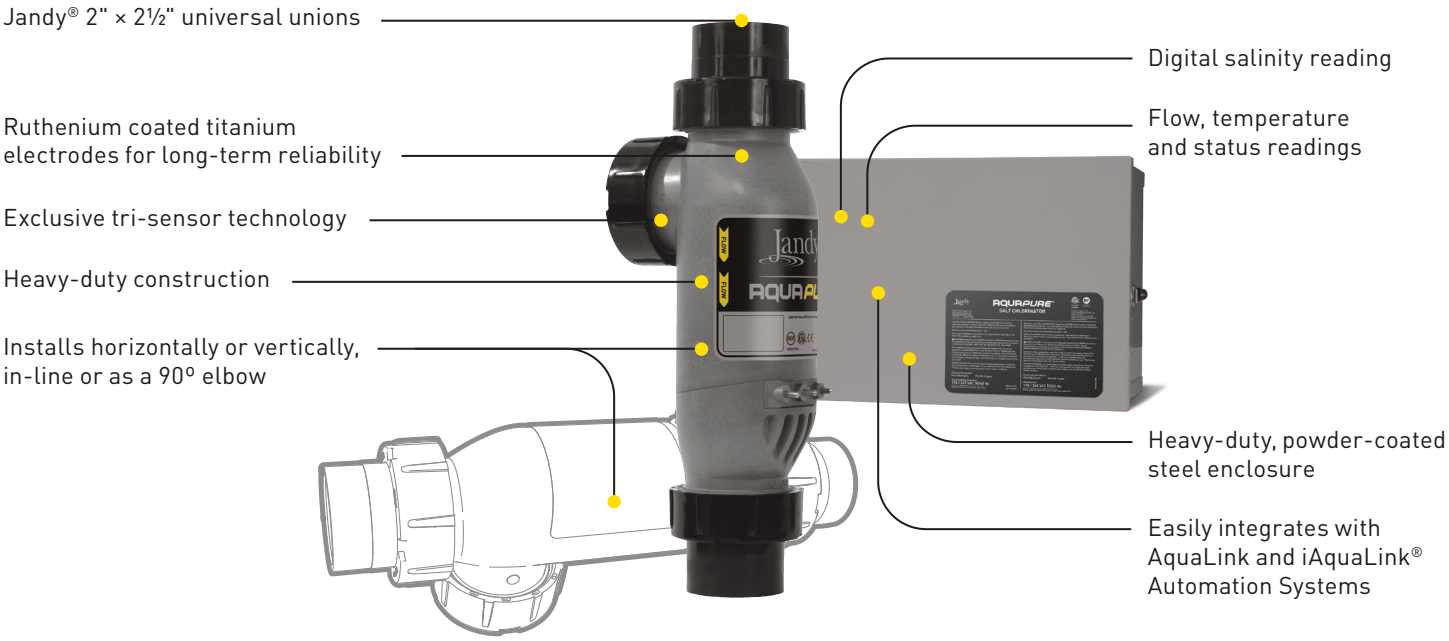

A Fluidra Brand | Jandy.com | 1.800.822.7933

TRADE SERIES EXCLUSIVE

Intertek

Certified to NSF/ANSI/CAN 50

74377.1_SL

©2025 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. 74377.1_SL