


TC3 Flush Mount Pool/Spa Return Jet


CAUTION

This product must be installed by a contractor who is licensed and qualified in pool equipment by the jurisdiction in which the product will be installed where such state or local requirements exists.


1. After the 1½" return line is plumbed through shell and pressure tested, cut pipe flush with the pool wall.

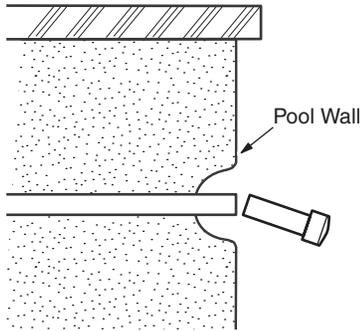

2. Use Inside Pipe Cutter (part #5-17-4) to cut pipe back 5/8" behind shell surface.

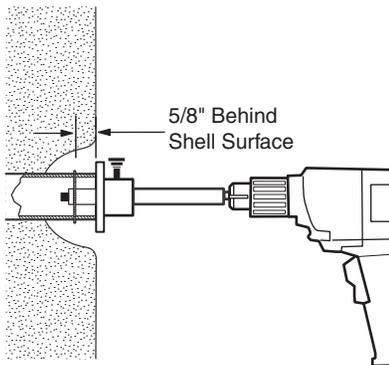

3. Prime pipe and fitting. With protective cap attached, glue fitting into pipe, positioning for thickness of finish material.
4. After troweling the final finish, use needle-nose pliers (or ThreadCare Tool, part #4-17-4) to remove the protective cap turning clockwise until cap separates or breaks off.

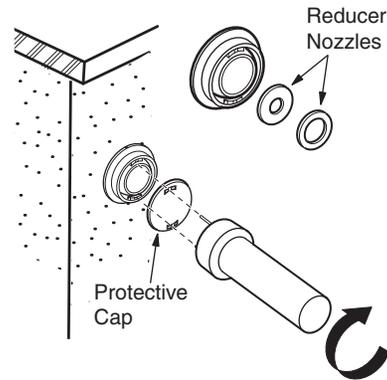


5. At startup, select and insert the applicable restrictor nozzle if required for the installation.

TC3 Flush Mount Pool/Spa Return Jet


CAUTION

This product must be installed by a contractor who is licensed and qualified in pool equipment by the jurisdiction in which the product will be installed where such state or local requirements exists.


1. After the 1½" return line is plumbed through shell and pressure tested, cut pipe flush with the pool wall.

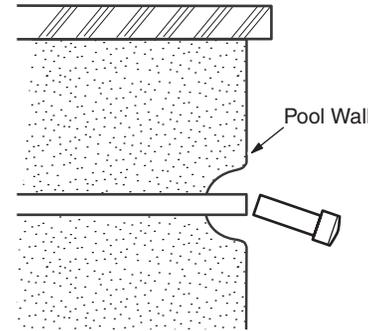

2. Use Inside Pipe Cutter (part #5-17-4) to cut pipe back 5/8" behind shell surface.

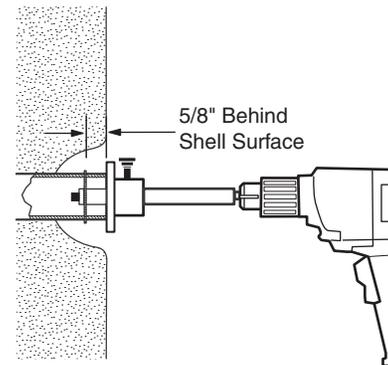

3. Prime pipe and fitting. With protective cap attached, glue fitting into pipe, positioning for thickness of finish material.
4. After troweling the final finish, use needle-nose pliers (or ThreadCare Tool, part #4-17-4) to remove the protective cap turning clockwise until cap separates or breaks off.

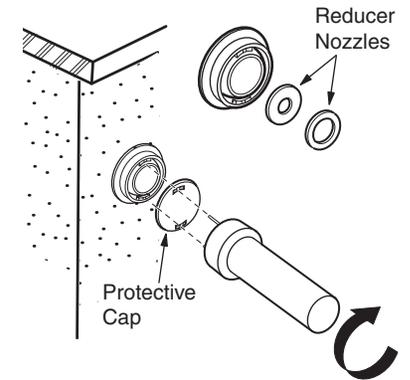

5. At startup, select and insert the applicable restrictor nozzle if required for the installation.