


Watermatic® Flow Switch Kit for C660 Controllers

1. Disconnect flow switch at controller.
2. Unscrew (no tools required) and remove the flow switch from the flow cell assembly. Discard the old switch.
3. Position small o-ring and switch cap on new flow switch. Insert switch into flow cell assembly and hand tighten.
4. If cell is leaking, a new body o-ring is included in the kit. Loosen screws on top of flow cell assembly. Lift off top and remove body o-ring. Install new body o-ring and secure top.
5. Connect new flow switch to controller using the 2-pin adapter.

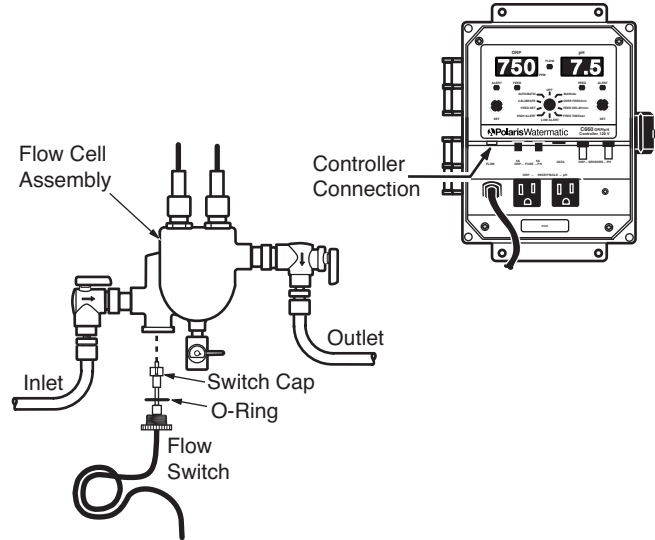

Zodiac Pool Systems, Inc.

2620 Commerce Way, Vista, CA 92081

1.800.822.7933 | www.zodiacpoolsystems.com

©2015 Zodiac Pool Systems, Inc. ZODIAC® is a registered trademark of Zodiac International, S.A.S.U., used under license.
All other trademarks referenced herein are the property of their respective owners.

TL-461 Rev B



ZODIAC®